


CORRIGENDUM 1

Replace in Annex A, the existing Figures A.1 and A.2, by the following new figures:

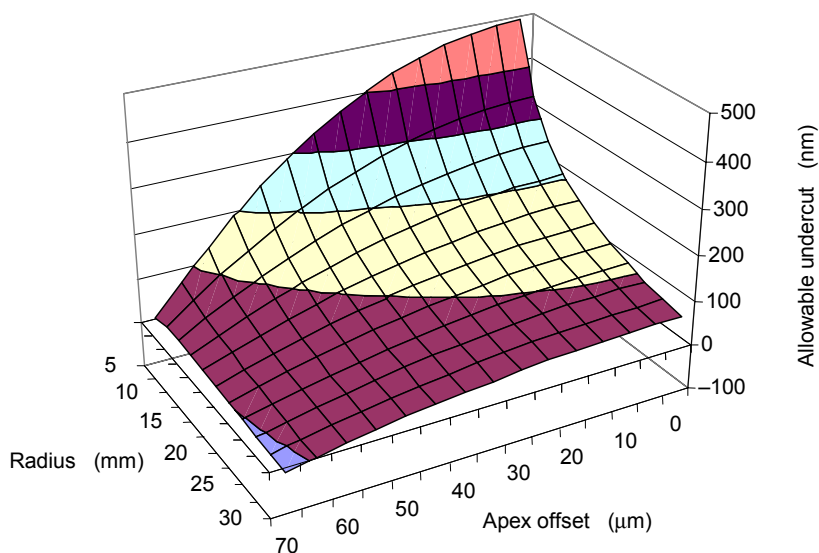

IEC 2332/08

$$A_{\text{maximum}} = 1\,988 \times B^{(-0,795)} - B \times 10^6 + \left(\sqrt{B^2 \times 10^6 - C^2} \right) \times 10^3 - 60$$

**Figure A.1 – Allowable undercut as a function of end face radius and apex offset –
4,9 N minimum contact force**